


PATENTED

APPLICATION: 3 WIRE DELTA (CORNER GROUND)

SERVICE VOLTAGE : 480

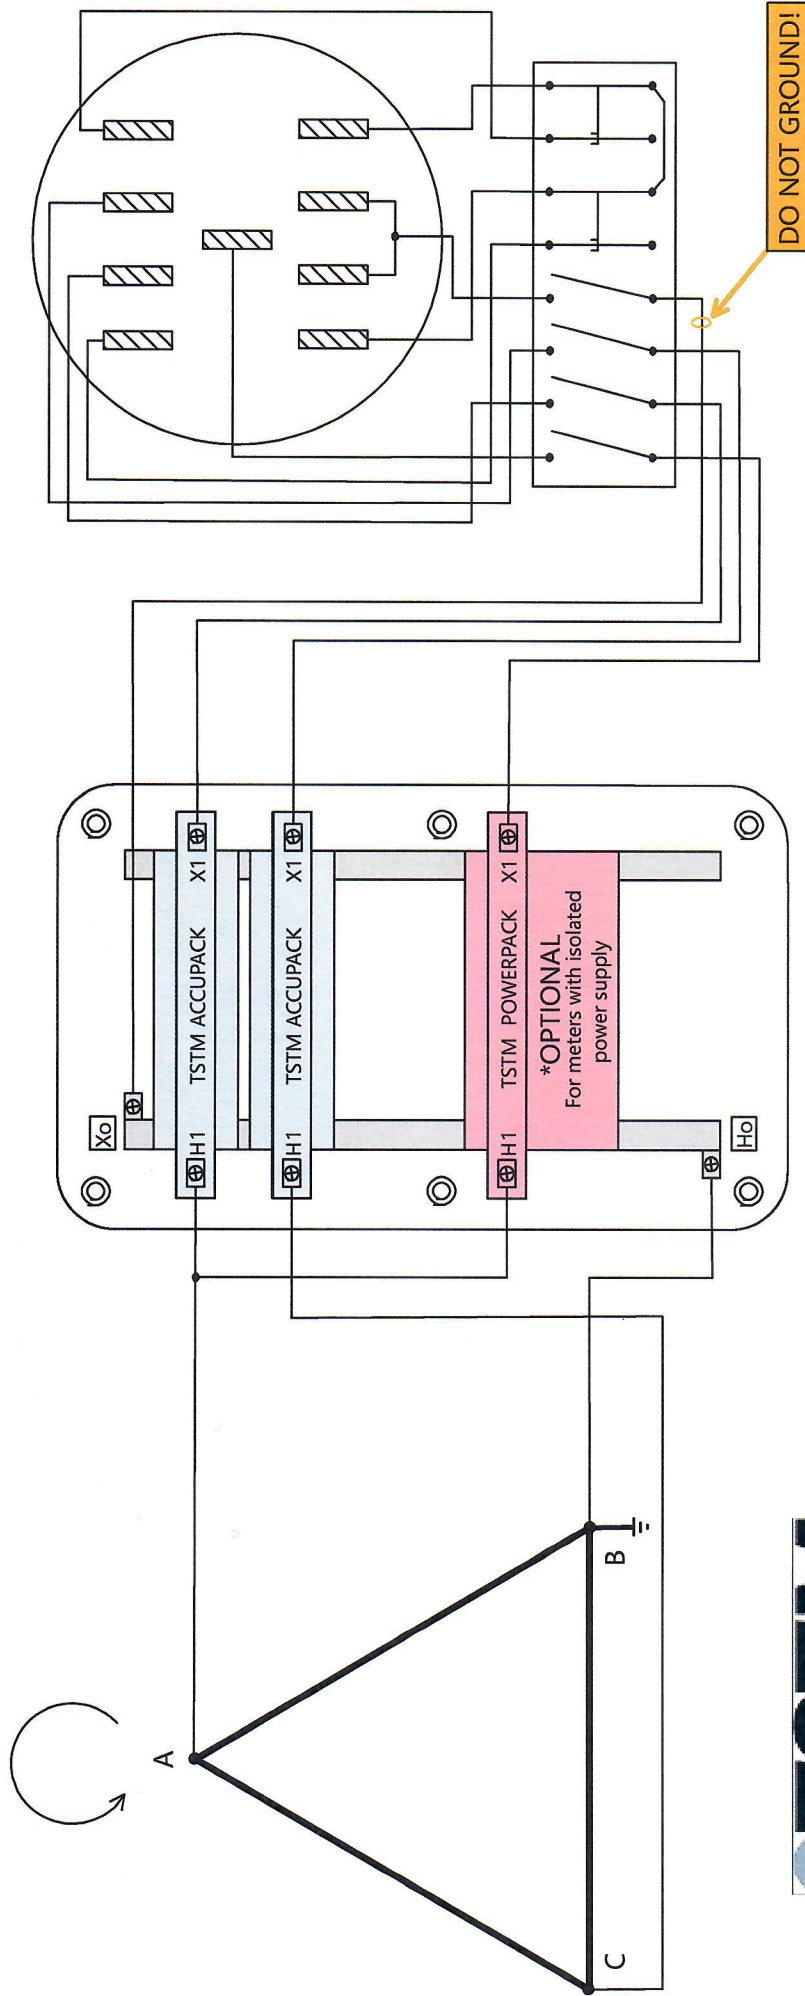

CT CIRCUITS OMITTED FOR CLARITY

15 TERMINAL SOCKET REQUIRED



DIAGRAM 8CD45 REV. 10.02
 FORM 135S* OR 145S* CL20
 WIDE VOLTAGE RANGE METER
 FILE NAME: 3WD_480_ACCUP
 DRAWN BY: JP
 DATE: 07232020
 * ANSI SUBMITTED FOR APPROVAL

PATENTED

Service Voltages and Suggested Ratios
 480V 2:1 OR 4:1

POWERPACK RATIO 2:1

**THIS IS NOT RECOMMENDED FOR
 3 WIRE UNGROUNDED DELTA!**

PATENTED